


## ArmorPad® 3NWL

13.9 OZ GEOMEMBRANE

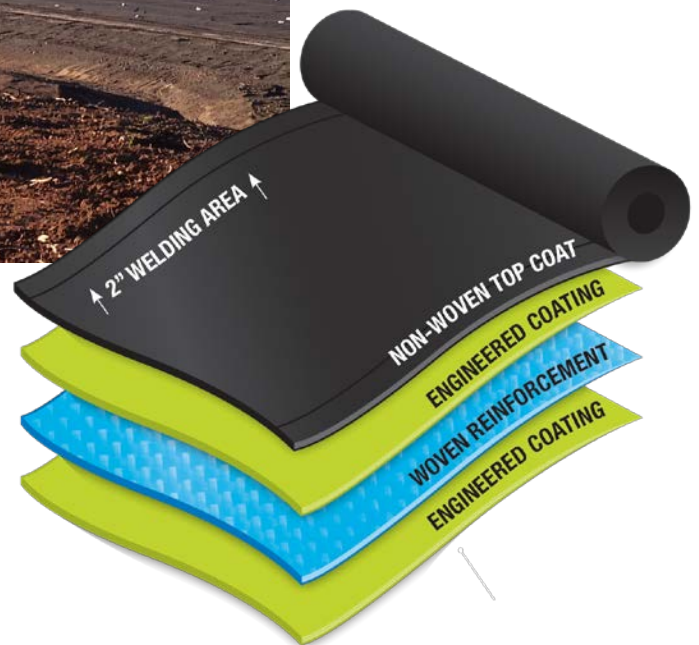

### PRODUCT DESCRIPTION

A heavyweight fabric incorporating a special weave pattern to enhance thickness, flatness, and tear properties. This product has a one side laminated non-woven geotextile to reduce slip risks in dry and wet conditions. The coating recipe is designed to improve toughness and abrasion resistance. This product is intended for short-term exposed applications.

### RECOMMENDED APPLICATIONS

Canal Lining, Well Pads

### PRODUCT DIMENSIONS

**Cores** 4 inch I.D. or 5 inch I.D. available (10 cm or 13 cm)  
**Width** Up to 150 in (381 cm) (-0, +0.5) as ordered  
**Length** Minimum 250 yds/roll (229 m); up to 500 yds/roll (457 m)

### PRODUCT SPECIFICATIONS

**Weave** Woven black HDPE scrim  
**Coating** 2.4 mil average each side (57 g/m<sup>2</sup>/side)  
**Anti-Slip Layer** 3 oz Needle punch PP  
**Color** White, black or other colored coatings available  
**Weight** 13.9 oz/yd<sup>2</sup> (471 g/m<sup>2</sup>) ± 5%

These values are typical data and are not intended as limiting specifications.

## PERFORMANCE PROPERTIES

The following data are typical values based on ASTM standard tests. This data should not be considered specification.

<b>Thickness</b> ASTM D1777	Nominal 24 mil (0.60 mm), ± 10% (without anti-slip layer)
<b>Grab Tensile (N)</b> ASTM D7004	MD 400 lb (1776) TD 300 lb (1332)
<b>Strip Tensile (N/5cm)</b> ASTM D7003	MD 220 lb/in (1954) TD 185 lb/in (1643)
<b>Tongue Tear—large scale (N)</b> ASTM D5884	MD 100 lb (444) TD 100 lb (444)
<b>Mullen Burst</b> ASTM D3786-01	530 psi (3652 kPa)
<b>MVTR</b> ASTM E96 Proc. BW	0.30 g/m <sup>2</sup> ·24hr (0.04 perms)
<b>Hydraulic Conductivity (Permeability)</b> Calculated from MVTR	2.68 x 10 <sup>-14</sup> cm/s
<b>Hydrostatic Resistance</b> ASTM D751	400 psi (2756 kPa)
<b>Puncture Resistance</b> ASTM D4833	195 lb (866 N)
<b>CBR Static Puncture</b> ASTM D6241	1128 lb (5016 N)
<b>Dimensional Stability</b> ASTM D1204	MD -1.9% TD -1.4%
<b>Low Temperature Flex</b> ASTM D2136	MD & TD: Pass @ -40°C (-40°F)
<b>Accelerated UV Weathering<sup>i</sup></b> ASTM G151 ASTM G154	>90% strength retention after 2000 hrs exposure @ 0.77 W/m <sup>2</sup> /nm, or 1200 hrs exposure @ 1.35 W/m <sup>2</sup> /nm

MD = Machine Direction. TD = Transverse Direction.

<sup>i</sup> Q.U.V [A-340 Lamps]; 8 hrs UV @ 60°C; 4 hrs condensation @ 50°C



These values are typical data and are not intended as limiting specifications.

While we believe them to be reliable, the statements and information herein are only for general guidance and are not warrants or guarantees for accuracy and completeness. The user must, by test or otherwise, determine suitability for this purpose. There is no warranty of fitness for a particular purpose. Our standard term and conditions of sale apply exclusively to all orders, and all liability for damages of any kind, including consequential, exceeding purchase price is excluded. No one is authorized by us to make oral warranties. We reserve the right to make changes without notice or obligation in our products and publications.