



INTERPACK™
BRAND PACKAGING SYSTEMS




Shown with optional infeed and exit tables and casters

USC 2020-SB

UNIFORM SEMI-AUTOMATIC CASE SEALER

Interpack's USC grade of case sealers are part of the USA SERIES Uniform Semi-Automatic family. The USC 2020-SB is designed and constructed for low to medium volume applications. They are adjustable, operator fed machines that process same sized RSC style cases. Every Interpack™ Case Sealer comes with ET 2Plus tape heads with adaptive technology to provide optimal tape application and wipe down to each of the 3 taped panels of the case.

When you compare features, benefits and value, Interpack Case Sealers are the right choice for operators, plant engineers, maintenance and purchasing.

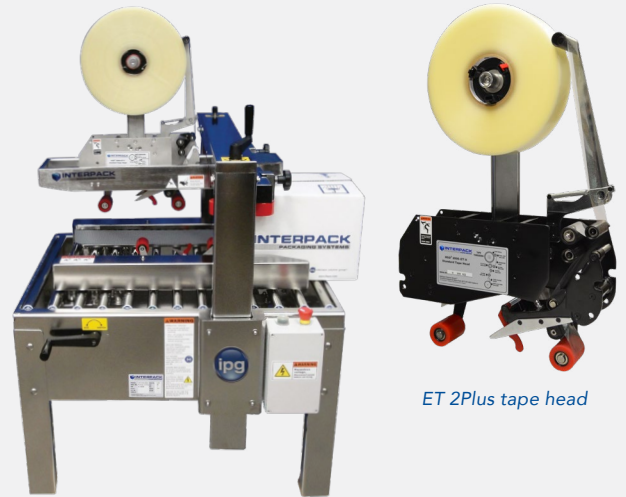

ET 2Plus tape head

Available in food grade 302/304 stainless steel and NEMA 4 electrics.

MACHINE FEATURES & BENEFITS

- Compact design conserves valuable floor space
- 3mm steel formed and welded construction
- 2" side belt drives with belt over roller technology
- ¼ HP motors will process up to 65 lb cases
- Dual column for maximum processing stability
- Threaded rod upper head adjustment
- Reversible controls for left or right handed operation
- Tilt up upper tape head for easy roll replacement

THESE MACHINES ARE ENGINEERED TO PROVIDE:

- Economical cost
- Compact footprint to conserve valuable floor space
- Ergonomic, user-friendly operation and case size set up

Scan for more information on Interpack's USA Series, including CAD drawings, manuals and videos!




800-474-8273 | itape.com




PRODUCT ATTRIBUTES

CHARACTERISTICS	USC 2020-SB*	USC 2020-SB/3*
Min Case (L x W x H)	6" x 4" x 5"	6" x 5" x 5"
Max Case (L x W x H)	Inf x 20" x 21.5"	Inf x 20" x 21.5"
Case Weight	0 - 85 lbs	0 - 85 lbs
Belt Speed	75 ft/min	75 ft/min
Electric	110v., 1ph., 60hz., 6A., (2 x 1/4HP)	110v., 1ph., 60hz., 6A., (2 x 1/4HP)
Tape Width	36 - 48 mm (1.5" - 2")	48 - 72 mm (2" - 3")
Conveyor Height	24" - 30"	24" - 30"
Machine Weight	445 lbs crated	445 lbs crated
Machine Dimensions	36" x 38.5" x 67"	36" x 38.5" x 67"

*Top squeezers close to 8" minimum



Tip-up tape head simplifies roll replacement



Side belt drive with belt over roller technology



1/4 HP gear motors to process up to 65 lb cases



Threaded rod upper head lifting



2-wheel top squeezer



Convenient in-feed guides

OPTIONS & ACCESSORIES

- 3-inch wide tape heads
- Heavy-duty casters (shown above)
- Infeed and exit tables (shown above)
- Infeed table with carton hold down device
- ET Xtreme™ tape heads

DID YOU KNOW?

IPG® is the only North American manufacturer of all 3 types of pressure-sensitive adhesives. Combine Interpack™ machinery and IPG long roll pressure-sensitive tape for greater value. Contact your authorized IPG distributor for details.



Scan for more info or visit itape.com/machines

